

Constant wattage heating cable

Silicone insulation (conductors 2 x 0,75 mm²)



Exposure temperature up to 180 °C with silicone insulation

Heating cable is used in industrial or commercial refrigeration installations to avoid ice in the drain pipes, condensation on the surface, and in applications on metal surfaces. It can be cut to size.

Application: Industrial and commercial refrigeration

- Copper conductor at 2 x 1,5 mm²
- Heating conductor element: Ni - Cr
- Nominal outler dimensions 8 x 6 mm.
- Minimum bend radius at 10 mm. to -40 °C
- Maximum exposure temperature (disconnected) 180 °C
- Distance between contacts: 595 mm.



Reference	Description	Family	Pack
AKO-5234	Heating cable 30 W/m at 230 V, silicone insulation	Constant Wattage	150m.(A)
AKO-52342	Heating cable 30 W/m at 120 V, silicone insulation	Constant Wattage	150m.(A)
AKO-52344	Heating cable 40 W/m at 230 V, silicone insulation	Constant Wattage	150m.(A)
AKO-52346	Heating cable 65 W/m at 230 V, silicone insulation	Constant Wattage	75m.(A)
AKO-52383	Kit for sealing connection termination + end	Accessories	25 Units

(A) The metres of packaged material are the standard ones; however, we reserve the right to supply in different lengths to those indicated.

Constant wattage heating cable

Silicone insulation (conductors 2 x 1,5 mm²)




Exposure temperature up to 180 °C with silicone insulation

Heating cable is used in industrial or commercial refrigeration installations to avoid ice in the drain pipes and condensation on the surface. It can be cut to size.

Application: Refrigeration and construction

- Copper conductor at 2 x 1,5 mm²
- Heating conductor element: Ni - Cr
- Nominal outler dimensions 9 x 6 mm.
- Minimum bend radius at 20 mm. to -40 °C
- Maximum exposure temperature (disconnected) 180 °C
- Distance between contacts: 500 mm.

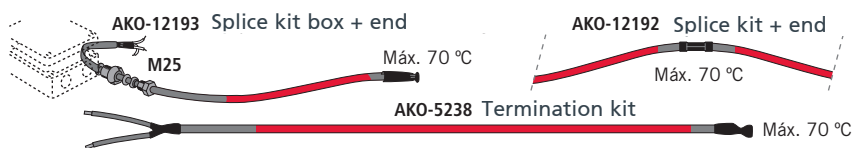

Reference	Description	Family	Pack
AKO-712545	Heating cable 50 W/m to 230 V, silicone insulation	Constant Wattage	100m.(A)
AKO-12192	Splice kit + end	Accessories	1 Unit
AKO-12193	Splice kit to M25 box + end	Accessories	1 Unit
AKO-5238	Termination kit	Accessories	25 Units

(A) The metres of packaged material are the standard ones; however, we reserve the right to supply in different lengths to those indicated.