


CENTER 110 MULTIMETER

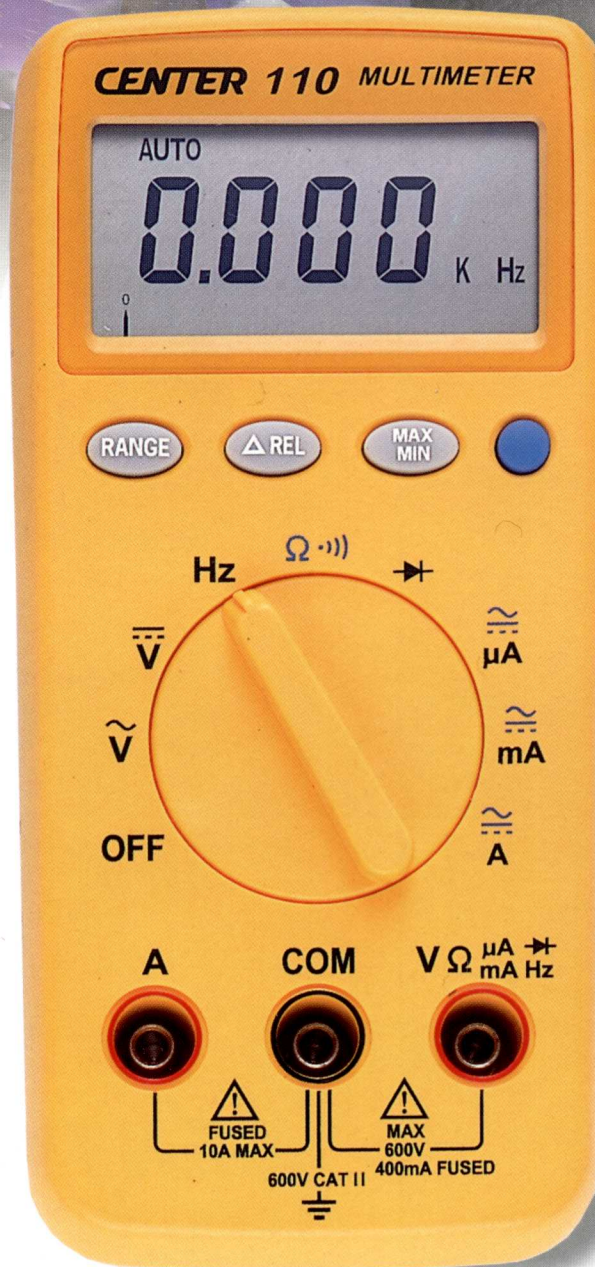


- Autoranging
- 3 3/4 Digits Display
- High Speed Bargraph
- Auto Power Off
- REL Function
- MAX MIN Function

CE IEC 1010 600V CAT II


CENTER®

CENTER 110 MULTIMETER





GENERAL SPECIFICATIONS

- Sampling Rate:** 2 times/sec for digital reading ;
20 times/sec for analog bar indication
- Low Battery Indication:** The  is displayed.
- Auto Power Off:** 30 minutes
- Battery Life:** 500 hours approx. (alkaline)
- Battery Type:** UM-4, Size AAA, 1.5V×2
- Safety Category:** IEC 1010 600V CAT II
- Operating Condition:** 0°C to 40°C (<80%RH)
- Storage Condition:** -10°C to 60°C (<70%RH)
- Dimensions:** 150×72×35mm (5.9"×2.8"×1.4")
- Weight:** Approx.220g
- Accessories:** Instruction Manual , Test Lead, Fuse (0.5A), Battery1.5V×2

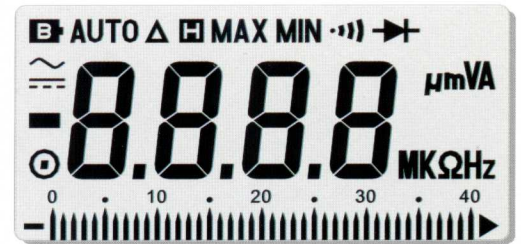3-3/4 Digits Display



ELECTRICAL SPECIFICATIONS

Function	Range	Resolution	Accuracy
ACV	400mV	0.1mV	±(1%rdg+4dgt)
	4V	0.001V	
	40V	0.01V	
	400V	0.1V	
	600V	1V	
DCV	400mV	0.1mV	±(0.5%rdg+2dgt)
	4V	0.001V	
	40V	0.01V	
	400V	0.1V	
	600V	1V	
ACA	400uA	0.1uA	±(1.3%rdg+5dgt)
	4000uA	1uA	
	40mA	0.01mA	
	400mA	0.1mA	
	10A	0.01A	
DCA	400uA	0.1uA	±(1%rdg+2dgt)
	4000uA	1uA	
	40mA	0.01mA	
	400mA	0.1mA	
	10A	0.01A	
Ohms	400Ω	0.1Ω	±(0.8%rdg+2dgt)
	4KΩ	1Ω	
	40KΩ	10Ω	
	400KΩ	100Ω	
	4MΩ	1KΩ	
	40MΩ	10KΩ	
Hz	4KHz	1Hz	±(0.1%rdg+1dgt)
	40KHz	10Hz	
	400KHz	100Hz	
	4MHz	1KHz	
	40MHz	10KHz	
		Test Current: 1mA	
		Active Sound Level: ≤40Ω	



Hang Convenience



Built-in Tilt Stand

CENTER[®]

CENTER TECHNOLOGY CORP.

4/F., NO.415, Jung-Jeng Rd., 238 Shu-Lin, Taipei, Taiwan
 TEL: 886-2-26763926 E-Mail: center@centertek.com
 FAX: 886-2-26763925 http://www.centertek.com

Distributed by: