

# CENTER 307/308 MINI THERMOMETER



- Dual Input
- Dual Display
- Auto Range
- Auto Power off
- REL Function
- HOLD Function
- MAX / MIN Function
- Resolution 0.1 °C / 0.1 °F

CE

CENTER®

# CENTER 307/308 MINI THERMOMETER



ACTUAL SIZE 1:1

## CENTER®

### CENTER TECHNOLOGY CORP.

4/F., NO.415, Jung-Jeng Rd., 238 Shu-Lin, Taipei, Taiwan  
TEL: 886-2-26763926 E-Mail: center@centertek.com  
FAX: 886-2-26763925 http://www.centertek.com

Distributed by:

## FEATURE

- Mini Size
- Auto Range
- Wide Measuring Range
- Dual Input (CENTER 308)
- Dual Display (CENTER 308)
- Auto Power Off
- REL Function
- HOLD Function
- MAX/MIN Function
- Resolution 0.1°C/0.1°F

Real Time Display With MAX MIN Recording



Dual Display

## SPECIFICATIONS

Measurement Range: -200°C~1370°C ; -328°F~2498°F

Accuracy: -200°C~1370°C.....±0.3%rdg+1°C

-328°F~2498°F.....±0.3%rdg+2°F

Input Protection: 60V DC or 24Vrms AC Maximum

Battery Type: 9V, NEDA 1604, IEC 6F22, JIS 006P

Battery Life: 120 hours (with alkaline battery)

Operating Condition: 0°C to 40°C (<80%RH)

Storage Condition: -10°C to 60°C (<70%RH)

Dimensions: 164×54×34mm (6.5"×2.1"×1.3")


Weight: Approx.200g

Accessories: Battery, Operation Manual

Temperature Probe TP-K01

(CENTER 307 1Pcs) (CENTER 308 2Pcs)

## OPTIONAL ACCESSORIES

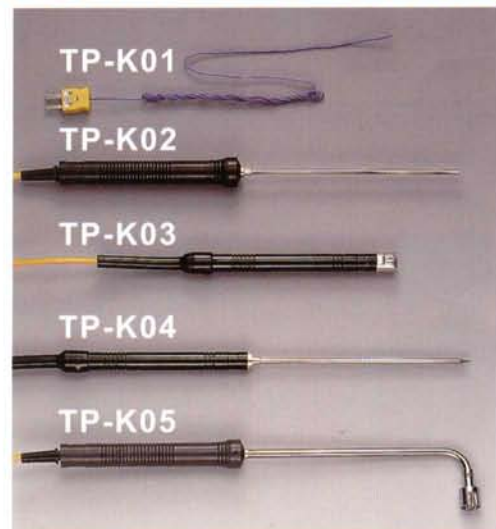

\* The specifications and other information in this catalogue are subject to change