



HS706 Hydraulic Comparator

The HS706 Hydraulic High Pressure Comparison Pump generates pressure up to 2500bar to calibrate high pressure instruments like differential pressure transducers, precision pressure gauges, general pressure gauges and other pressure instruments.



Applications:


Best suited for use in the following industries/sectors:

- Power
- Chemical
- Petrol
- Metallurgy
- Metering
- Military

Features:

- Transparent oil cup, marks balance of working medium
- Hand pump and booster
- Secondary oil filter and a settler
- Waste oil filtered by duplex tank
- Shut-off valve
- Lead screw adjusts pressure values



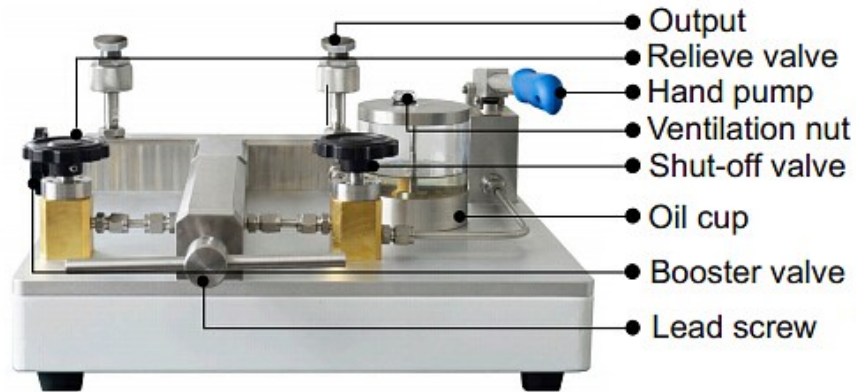

Specifications:

Generated Pressure Range	0 ~ 1600 bar, 0 ~ 2500 bar
Working Medium	25# transformer oil
Adjust Resolution	10mbar
Material	Stainless steel/Aluminium body, Buna-N seals
Output Interface Connection	M20 x 1.5 (female)
Accuracy	Better than 0.05% FS
Dimensions	570L x 490W x 195H (mm)
Weight	25kg