



HS728 Bench-Top Pressure Calibrator

The HS728 Bench-top Pressure Calibrator (oil) consists of a hand pump, lead screw, shut-valve, transparent oil tank, and output interface. It features high sealing performance, stable and fast pressure rising, labour-saving and is easy to use. The HS728 is the ideal substitute for the dead weight tester.



Applications:


Provides pressure for oil gauges under test. Best suited for use in the following industries/sectors:

- Power
- Chemical
- Petrol
- Metallurgy
- Metering
- Military

Features:

- Unique design and user-friendly operation
- Transparent oil cup, marks balance of working medium
- Hand pump and booster
- Secondary oil filter and a settler
- Waste oil filtered by duplex tank
- Shut-off valve
- Lead screw head adjusts pressure values



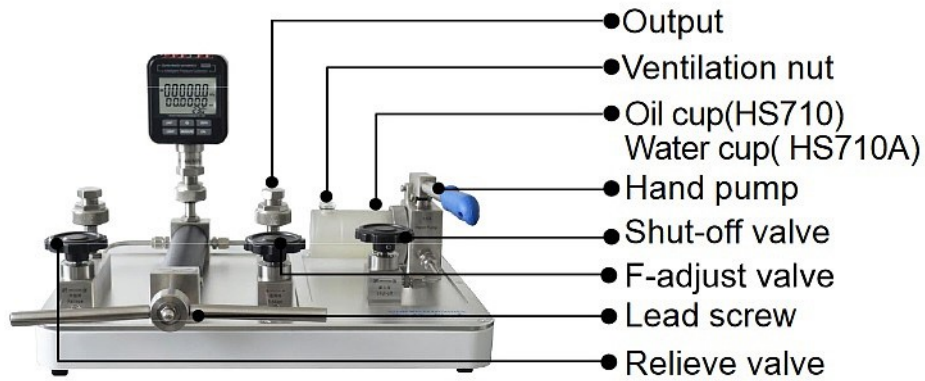

Specifications:

Generated Pressure Range	0 ~ 1400 bar
Working Medium	25# transformer oil
Material	Stainless steel/Aluminium body, Buna-N seals
Output Interface Connection	M20 x 1.5 (female)
Weight	19kg
Dimensions	580L x 520W x 370H (mm)

